



# CERAMIC COMPONENTS FOR SENSOR AND MEASUREMENT TECHNOLOGY

High-performance ceramics

## TABLE OF CONTENTS

<b>INTRODUCTION</b>	<b>02</b>
<b>AVAILABLE APPLICATIONS</b>	<b>04</b>
Pressure and temperature measurement	04
Temperature measurement	06
Flow measurement	08
Level measurement	10
Oxygen measurement	12
Humidity measurement	13
Force, position and others	14
<b>TECHNOLOGIES</b>	<b>16</b>
Simulation technology	16
Coating technology	16
Brazing technology	17
Sinter-in technology	18
Roll compaction technology	19
<b>MATERIAL OVERVIEW</b>	<b>20</b>
<b>ABOUT KYOCERA</b>	<b>22</b>

### PROPERTIES OF KYOCERA'S HIGH-PERFORMANCE CERAMICS

For all applications shown in this brochure you will find these icons below the headline. They indicate which properties of our ceramics are most important in this specific application.



**Mechanical properties**  
(e.g. strength, hardness, wear resistance)



**Thermal properties**  
(e.g. high temperature resistance, thermal conductivity, thermal shock resistance)



**Electrical properties**  
(e.g. resistivity, dielectric strength, dielectric loss)



**Chemical properties**  
(e.g. corrosion resistance, chemical inertness)



Together with our customers we develop ceramic components for sensing applications which work even under extreme conditions.

## PRESSURE MEASUREMENT



In various applications and devices, it is crucial to precisely measure and monitor the pressure. The most reliable sensors tend to use ceramic as one of their key components.

High rigidity and long lifetime of ceramics make it possible to measure a wide range of pressure with one sensor without maintenance or re-calibration for a long period of time. The parts keep their high Young's modulus under high temperature and high pressure and are fatigue-free.

Pressure sensor components from Kyocera are perfect for use in harsh environments such as contact with various liquids. They show excellent chemical resistance as well as temperature resistance and thermal stability over time. Thick film printing of conductor or resistor can be carried out directly without additional isolation process.

Technologies that are currently supported by Kyocera are:

- ▶ Substrate + membrane
- ▶ Monolithic ceramic
- ▶ Pedestal


Kyocera offers proven and highly efficient series production up to very large scale, based on many years of experience.

High precision machining to reach tight tolerances is another specialty of Kyocera in this kind of application. By utilising a strong production infrastructure Kyocera can offer highly customized designs for different pressure ranges and according to customers' needs.




The above ceramic components can be used for different kinds of pressure measurement principles.


### Capacitive pressure measurement

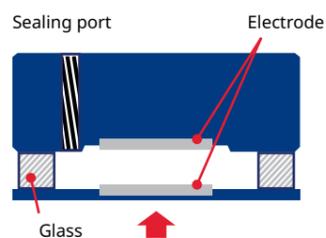

### Pressure measurement with MEMS chip

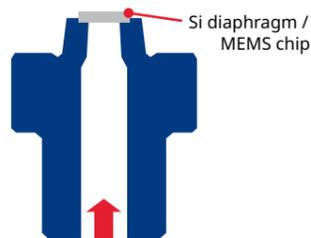

### Piezo-resistive pressure measurement

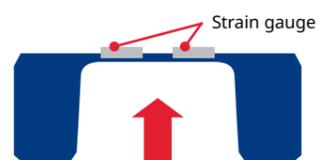

## PRESSURE AND TEMPERATURE MEASUREMENT



Gold-coated alumina components for temperature and pressure sensor assembly

If measurements are supposed to be performed under demanding conditions like e.g. high-temperature or high-pressure suitable materials are needed to protect the sensitive measurement device and electronics. The influence of protection on the measurement and thus on the results should be kept as small as possible and ideally be zero. For inductive and capacitive sensors metal cannot be used as protection material due to its electric and magnetic properties. Most ceramic materials show a very low dielectric loss and are transparent for microwaves so that there is no influence on the measurement signal while their high mechanical strength and abrasion resistance makes them the perfect choice for protecting the sensor and its electronics. Kyocera offers customized ceramic parts for this purpose which in some applications already manage to resist a pressure of 1,400 bar under elevated temperatures and in a corrosive environment.

Certain ceramic materials can still be used at 1,800 °C or above. Even when stressed by continuous strong vibration ceramic still shows sufficient impact toughness. Especially in the Oil & Gas industry as well as in the renewable energies sector ceramic components fully comply with the requirements concerning reliability and lifetime.

In close cooperation with our customers Kyocera develops customized components which can for example be optimized to a minimum need for space in the customer's assembly.

The above sensor components are an example of ceramic design for pressure and temperature sensors where the required material needed to be carefully selected. When you need to monitor pressure, temperature, water, sand and more in the well to achieve maximum reservoir performance Kyocera's high-performance ceramics are successfully used since 1996 in the Oil & Gas industry.

Increasingly deeper wells give higher pressure and higher temperature. For downhole technology the requirements on the parts used are very high.

Requirements for this application:

- ▶ Pressure requirements 20,000 psi / 1,400 bar
- ▶ Temperature requirements -46 to 225 °C / 437 °F (Formerly existing instruments only withstood up to 180 °C and at lower pressures)
- ▶ Continuous and strong vibration and shock resistance
- ▶ Withstand corrosive and abrasive environment
- ▶ Long life time up to 25 years
- ▶ Small size of components (diameter < 25.4 mm = 1 inch)
- ▶ High demands on electrical properties
- ▶ Easier assembly thanks to miniaturization
- ▶ Stable dielectric constant leads to very good microwave properties

## SUBSTRATES FOR THIN FILM TEMPERATURE SENSORS




Ceramic substrates are mainly used as hybrid IC substrates, thin film IC substrates, heat dissipation substrates, and LED sub-mount substrates. Thin film substrates not only require a very smooth surface but also low thermal expansion in high temperature environments.

Kyocera's thin film substrates are made of high purity 99.6% alumina. Our micro-grain material structure enables substrates which have excellent surface quality with less voids, high flexural strength and electrical insulation in high temperature environments.

As additional feature, very fine through holes can be cut or electrode patterns (metallization) can be formed by printing or plating the substrate. Metallization is available with high adhesion strength Mo-Mn and there are various options for conductive layers incl. Ag or Cu. Customized pattern printing is possible.

Substrate sizes:

- ▶ Outer dimensions: 2" - 5", max. 165 mm sq.
- ▶ Thickness: 0.254 mm, 0.381 mm, 0.635 mm (other thicknesses available from 0.1 - 2.5 mm)
- ▶ Outer dimensions tolerances: Standard  $\pm 0.8\%$  of the outer dimension, min.  $\pm 0.10$  mm
- ▶ Thickness tolerances: Standard  $\pm 10\%$  of thickness, min.  $\pm 0.05$  mm

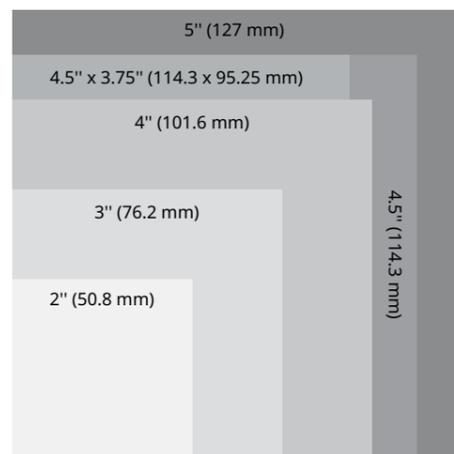

Scale 1:2



Substrates made of alumina A493

## HIGH-TEMPERATURE MEASUREMENT




Tubes and capillary tubes made of alumina DEGUSSIT AL23 and AL24 are the best choice for the highest demands for thermocouple protective tubes. Because of their special structural properties they can also be used at temperatures above 1,800 °C. At the same time the material is very resistant against predominant corrosive load in the kiln or the melt. In addition it has a high heat conduction thus leading to very short response time of the thermocouple.

Of course the electrical isolation properties are excellent even at high temperatures. Kyocera uses a special closing technology for one-end closed tubes so that there is no joining zone with reduced resistance or stability. The excellent processing of the closed end of the tube ensures a uniform, dense structure and, in turn, protection against cracks and leaks.



Thermocouples made of DEGUSSIT AL23 can be used at temperatures above 1,800 °C.

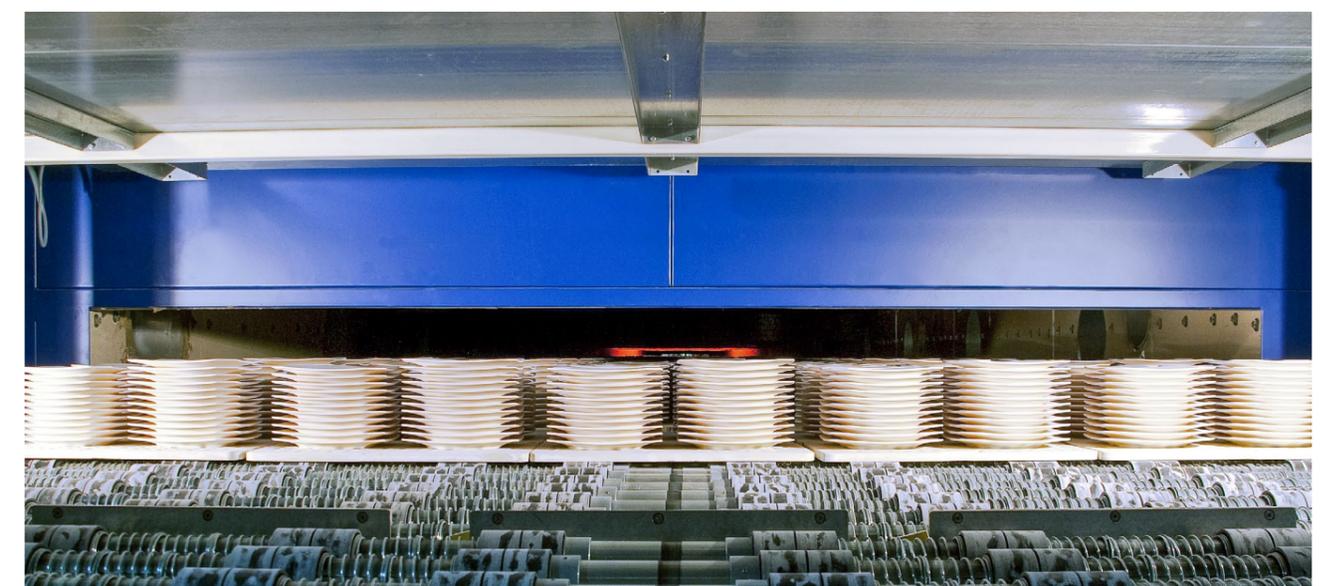

Source: Keramischer OFENBAU GmbH

Visit our webshop at  
<https://shop.kyocera-solutions.de/>

## FLOW MEASUREMENT

In a lot of industrial environments, it is essential to measure the flow and in some situations at the same time also the composition of flowing goods.

Key requirements are precision, reliability and high lifetime.

Kyocera provides ceramic components for different types of flow meters.

### MAGNETIC-INDUCTIVE FLOW METER



The extraordinary properties of technical ceramics ensure precise and safe processes in filling systems for liquids and pasty substances. The cermet electrode is unique and patented, an electrically conductive compound of magnesia-stabilized zirconia FZM, a material with very high mechanical strength, and platinum. These cermets are e.g. used in magnetic-inductive flow meters. They are tested in accordance with pressure equipment standards with tenfold nominal pressure safety allowing components made of advanced ceramics to be used under very demanding corrosive and/or abrasive conditions and enabling accurate and precise filling. They show no deformation over time which makes a re-calibration unnecessary.



Flow meter in zirconia FZM for the food processing industry



Assembly situation

### FLOAT-TYPE FLOW METER



Float bodies made of alumina F99.7 extend the application spectrum of measuring devices to flow monitoring. As the material is extremely resistant to corrosion and wear, precise control of the liquid flow can be guaranteed even for aggressive materials. To ensure a precise measurement of the flow rate the body must be machined to very tight tolerances of a few hundredth of millimeters.



Float bodies in alumina F99.7 for flow monitoring in the chemical industry

### WATER-CUT METER



Another flow measurement principle is based on capacitive sensors. It utilizes ceramic sensor components and sensor rings, partially metallized and brazed, in so called watercut meters. These sensors allow a capacitive analysis of the ambient media and an exact determination of the proportion of different substances in liquid and gaseous media. Such systems are successfully used in the offshore and subsea industry for 25 years under pressures of more than 1,000 bars.



Water-cut meter for the Oil & Gas industry

### MULTI-PHASE FLOW METER



In the Oil & Gas industry the requirements regarding performance, reliability and lifetime are very high in general and were specifically of highest priority in this very application. The materials and components used should be resistant to extremely high erosion, abrasion, and corrosion. This type of multi-phase flow meter can constantly measure the flow in the oil well and distinguish between oil, water and saline (saltwater). The ceramic resonator was developed to be suitable for microwave measurement principle and is made of FZM zirconia ceramic with a partial gold coating and shrunk into an inconel housing. In this case the resonator itself was supposed to have a dielectric constant of 35 which Kyocera's material could exactly meet. The gold-coated ceramic resonator is able to give very precise Q-values and was proven to be suitable for the multi-phase measurement setup.



Resonators for microwave based measuring in flow meters

Liquids, bulk materials and separating layers are simply and reliably measured.

## LEVEL MEASUREMENT

Reliable and flexible measurement of the level in silos, tanks or other storage containers: no problem with sensors made of Kyocera's technical ceramics.

### GUIDED WAVE RADAR



Customized electric feedthroughs and coated components from Kyocera enable our customers to enter new fields of applications with their guided wave radar level measurement devices due to the excellent properties of our ceramic materials. The ceramic components work as isolators and mechanical support for the wave antenna. The electromagnetic waves emitted are guided along cable or rod probes and reflected on the surface of the product. Adhesives, dust, or vapors do not influence the measurement result. This ensures that liquids, bulk materials and separating layers are simply and reliably measured. Well-engineered and tailor-made products are the basis for precise measurements in the most demanding environments.



High-pressure and high-temperature microwave feedthrough and TiN-coated mechanical sealing made of zirconia-toughened alumina FZT

### RADAR/FREE PROPAGATION



Level sensors operate more and more frequently with radar or ultrasonic transmitters made of alumina F99.7 or F99.7 hf. Examples are level sensors in silos and tanks. When measuring the level, Kyocera's aluminum oxide ceramics are used as antennas or transmitters of the radio waves, microwaves, or ultrasonic waves. By means of the connected electronic measurement device precise measurements of the level in the container or tank can be obtained, based on travel time or frequency changes. Kyocera offers a large variety of different materials and technologies to comply with the requirements.



Level sensor antenna made of alumina F99.7

### CAPACITIVE



Safety and sturdiness are essential requirements for most sensors in the Oil & Gas industry. Capacitive level sensors with advanced ceramics are suitable for such applications. They are lined up along a measuring rod and each sensor can detect what is in front of it, e.g. sand, water oil, foam or gas. They are resistant to wear, corrosion and dirt. By knowing the position of each sensor one can calculate the level of all phases present in the tank. This is true multi-phase level measurement.



Sensor heads made of alumina F99.7 and titanium with laser marking



Source: ACO Automation Components Johannes Mergl e.K.

## OXYGEN MEASUREMENT



DEGUSSIT FZY (Y-PSZ, zirconia partially stabilized with yttria) was specifically developed to be used on oxygen sensors. The measurement principle corresponds to that of the  $\lambda$ -sensor (lambda-sensor) in cars. However, sensors with DEGUSSIT FZY material are mainly used in industrial high-temperature processes to precisely and reliably measure the oxygen content of the atmosphere. The measurement is based on a special property of this material: it becomes conductive for oxygen ions at elevated temperatures of around 400 °C and above. Oxygen sensors based on this principle and material normally work well in a temperature range of 400 °C – 1,500 °C.

There are unheated oxygen sensors which are used directly in high-temperature processes and others which are used at room temperature but have to be heated up before measurement. Typical fields of application are monitoring of annealing processes or protection gases, surface treatment (e.g. hardening processes), monitoring of redox reactions or diffusion processes, biotechnical processes and quality control of food packaging.



Components for oxygen measurement made of zirconia DEGUSSIT FZY



Brazed component for oxygen measurement made of zirconia DEGUSSIT FZY

## HUMIDITY MEASUREMENT



In humidity sensors often several unique properties of technical ceramics are needed: Besides its rigidity, corrosion and wear resistance, ceramic to a large extent is transparent for electromagnetic radiation and electrically isolating. In most cases ceramic does not affect the measurement signal and is already successfully used e.g. as mechanical protection of the very sensitive continuous capacitive humidity sensor. Especially measuring abrasive materials like sand, grit or ore requires the use of ceramic as protection of the sensor.

With DEGUSSIT F99.7 hf a material can be offered which was specifically developed and optimized for use in high frequency applications, and which has constantly very low and accurate dielectric losses. Applications are e.g. as RF window, a window transparent for electromagnetic radiation in an assembly otherwise completely made of metal. Different joining methods are available to connect ceramic and metal parts. Applying conductive layers of different thicknesses and compositions as well as ceramic and/or metal is also possible, so that the production of quite complex components is a challenge but not a problem for us.



Humidity sensors



Source: ACO Automation Components Johannes Mergl e.K.


## FORCE, POSITION AND OTHERS



### THICK FILM SUBSTRATES

Kyocera's thick film substrates are perfectly fit for the high density and precision of thick film switches which are used, for example, in force sensors with cantilever measurement principle.

Kyocera's alumina substrates are suitable as reliable components for a variety of thick film processes: strictly controlled outer dimensions ( $\pm 0.25\%$  max.) and small holes (0.2 mm max.) are possible, which comply with the high density and precision needed in thick film applications.

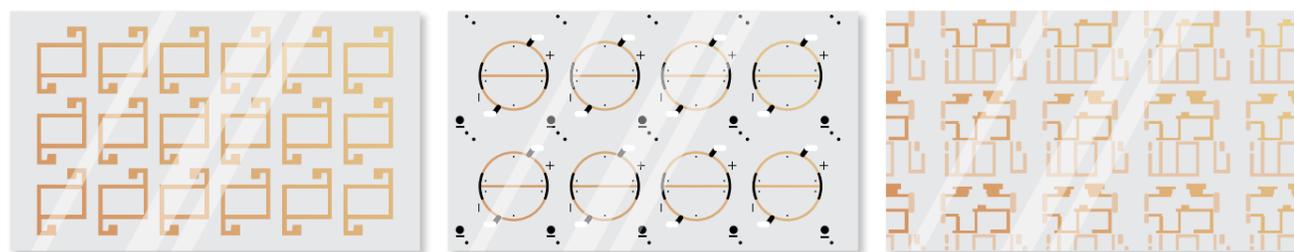

Examples for different thick film substrate designs

### CERAMIC CAP

Ultra-thin ceramic caps enable devices to become smaller in size and lower in height. By these features the miniaturization requirements from electronics industry are supported.

Material options:

- ▶ A445F (dark alumina)
- ▶ A476 (white alumina)

These caps are used as covers for:


- ▶ gyro sensors
- ▶ power semiconductors
- ▶ oscillators
- ▶ resonators



Ceramic cap made of black alumina

Thickness [mm]	Conventional technology	New technology
Side wall thickness	0.24	0.12
Top wall thickness	0.20	0.15

Minimum wall thickness comparison

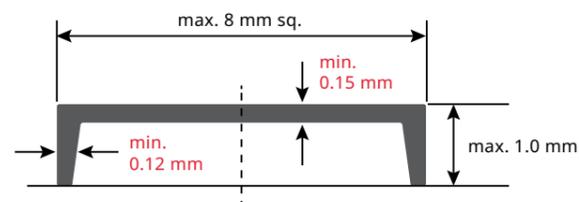


Minimum and maximum dimensions of a Kyocera ceramic cap



**Kyocera supplies reliable components for a variety of thick film processes.**

## SIMULATION TECHNOLOGY

In some cases, especially for new applications of ceramic materials, it can be very useful to do a simulation beforehand. This can save a lot of time as well as costs. Critical factors as point loads, thermal stresses and fatigue can be identified and the construction can be adapted accordingly before any failure or damage occurs. The Kyocera engineering team is familiar with the specialties of ceramic components and offers a broad expertise in choosing the right parameters for simulation. Most common simulation approaches are available within Kyocera, mainly based on FEM analysis. So based on the assembly situation and customer's requirements e.g. the tensile stress distribution on a pump impeller, the heat distribution on a ceramic heater or fracture probability of a turbine blade, taking into account the Weibull modulus, can be simulated and calculated.

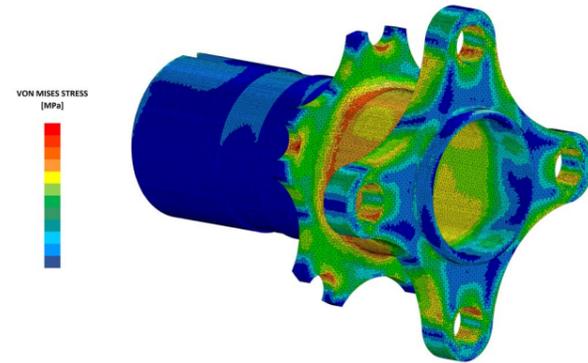

Kyocera's simulation technology

## COATING TECHNOLOGY

Different kinds of coatings grant different properties and serve different purposes. Depending on the application it might for example be necessary to apply an electrically conductive layer onto the normally electrically isolating ceramic body. Coatings or metallization are also used as preparation for subsequent joining processes as brazing or welding.

Kyocera offers a variety of different coating technologies and materials. An overview can be found in the following table. If your required coating is not mentioned in the table please contact us.

We do not necessarily do all coatings in house. For very special requirements and specific technologies we rely on our excellent network of coating partners and suppliers.


Material	Ag	Au	Pt	Ag-Cu-Ti	MoMn	Ti	TiN	Ni / MoMn	Cu / MoMn	Sn / MoMn
Screen printing	■	■	■	■	■			■		
Manual applications	■	■	■	■	■			■		
PVD	■	■				■				
CVD							■			
Galvanic								■	■	■

Materials and processes for coating of ceramics

## BRAZING TECHNOLOGY

Many applications require mechanically stable and highly vacuum-tight joining of ceramic parts with each other and/or with metal parts. Components made of high-performance ceramics are generally metallized using the molybdenum-manganese procedure (MoMn procedure) and subsequent nickel-plating. The starting point for this process is a compound of molybdenum and manganese. The compound is applied to the ceramic surface to produce a firmly bonded metallized coating through a firing process. As the majority of commercial vacuum hard solders do not wet the metallized surface, it is nickel-plated using a galvanic or autocatalytic method. The component can be brazed on this base metallized coating.

Metallization allows for brazing at temperatures above 1,000 °C under protective gas atmosphere or in vacuum. A silver copper eutectic alloy is used as a standard brazing material. Brazing materials with increased melting properties are applied when higher requirements are imposed on the operating temperature, corrosive properties and use of metals that are hardly wetted by the silver-copper eutectic alloy. The table below gives an overview of available brazing alloys. Our metallized ceramics are also available with galvanic coating such as Au, Ni or Cu to allow for the use of soft solders at low temperatures.

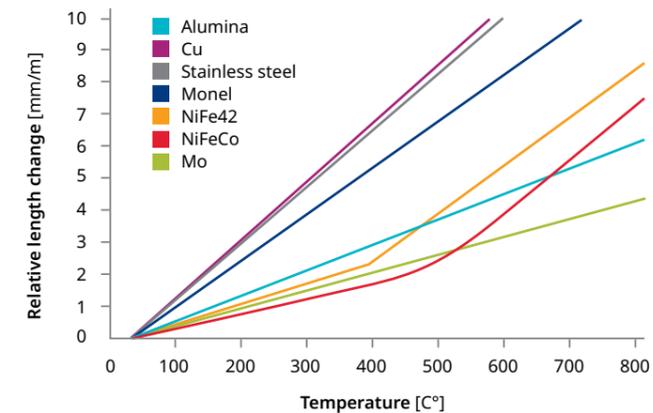

Thermal expansion characteristics of metallic materials and alumina ceramics


Brazing material	Brazing temperature [°C]
Ag Cu 28	780
Ag Cu 26,6 Pd 5	800 - 850
Ag Cu 21 Pd 25	900
Au Ni 18	950
Cu Ge 10	1,000
Au Cu 65	1,020
Au	1,070

Brazing materials and brazing temperatures

## SINTER-IN TECHNOLOGY

Either pure platinum pins or "cermets" can be used for our sinter-in technology. Platinum is a precious metal with a similar level of corrosion resistance as ceramic and is protected against mechanical effects by the surrounding ceramic. Cermets are a mixture of ceramic and platinum (cermet = ceramic & metal) and have even better attributes as an electrode material than pure platinum. Kyocera has a special and unique technology to sinter e.g. electrodes into a ceramic body and to manufacture suitable cermet electrodes. This is an established procedure in our production processes and we have many years of experience in this technology. The benefit of this joining method is that no further aids are required and therefore, the final product does not contain any metallic (apart from the platinum for the electrodes) or organic substances. Cermets are more resistant to corrosion and wear than platinum. Furthermore, the connection between the cermet electrode and ceramic is even more robust and withstands high pressure and fast temperature changes without problems.

When sinter-in the cermet electrodes, diffusion processes between the electrode and the ceramic form a solid ceramic connection so that the joint zone is no longer a mechanical weak point. This is proven impressively in the mechanical load test, in which the measuring tube does not generally break at the electrode but in the middle of the ceramic structure. Of course, this technology is also subject to certain limitations. Therefore, the electrodes must have a shape as simple and round as possible. Furthermore, sinter-in is limited to relatively small electrode dimensions of several millimeters depending on the material. A minimum electrode length of several millimeters is required for a reliable and stable connection between the ceramic and the electrode.

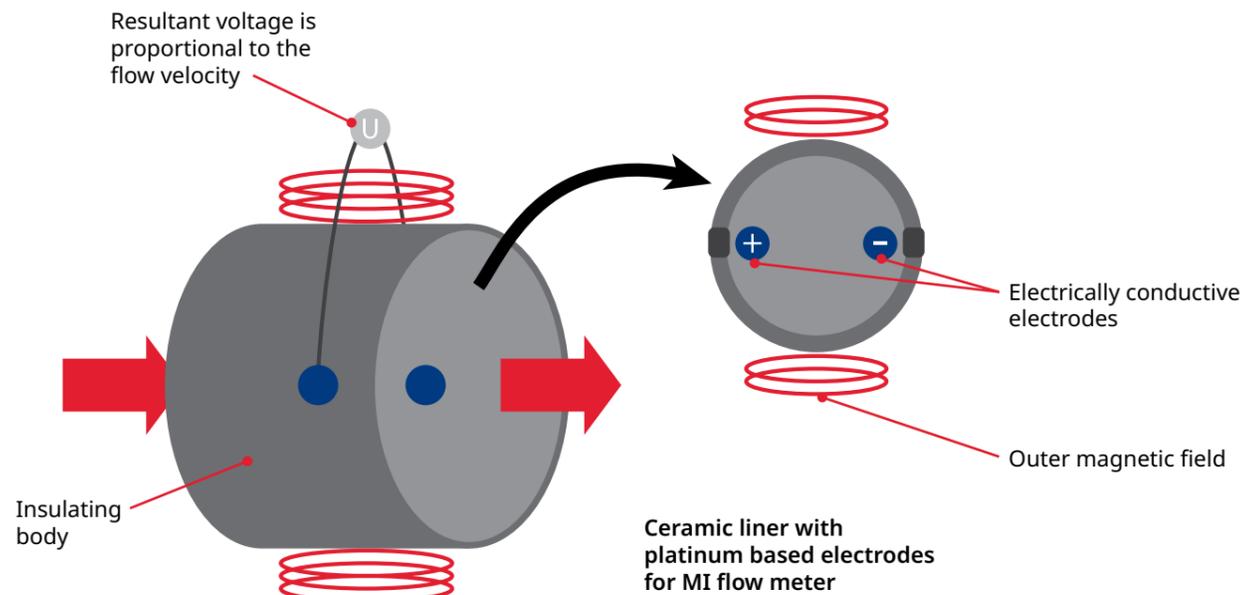


Working principle of magnetic-inductive flow meter

## ROLL COMPACTION TECHNOLOGY


Roll compaction is a unique technology of Kyocera to form thin plates directly from granules. This technology is in direct competition with (e.g. doctor blade) tape casting and offers a very efficient process without need to prepare the ceramic slurry as well as a high material output without need to dry the tape before sintering.

Roll compaction uses the same material that was prepared for die pressing or isostatic pressing, e.g. A476. The granules are soft due the organic binder they contain and thus can easily be deformed by metallic rolls. The rolls deform and compact the granules so that they connect to each other and form a dense surface and microstructure. The tape produced can be handled in the same way like a tape made by doctor blade tape casting after drying and e.g. easily be cut to size or stored on a roller.

This technology requires deep knowledge of the binder composition and granule behaviour and the process parameters have to be precisely adapted to form a tape that meets the requirements of our customers.

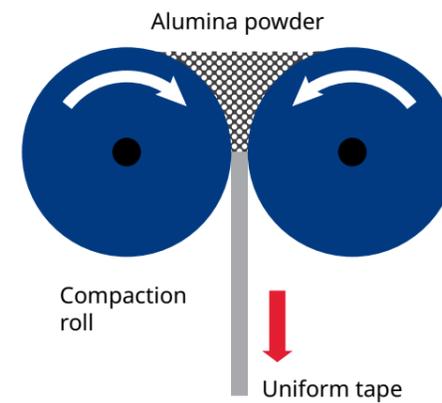

Kyocera's unique method: Roll compaction method (R/C)

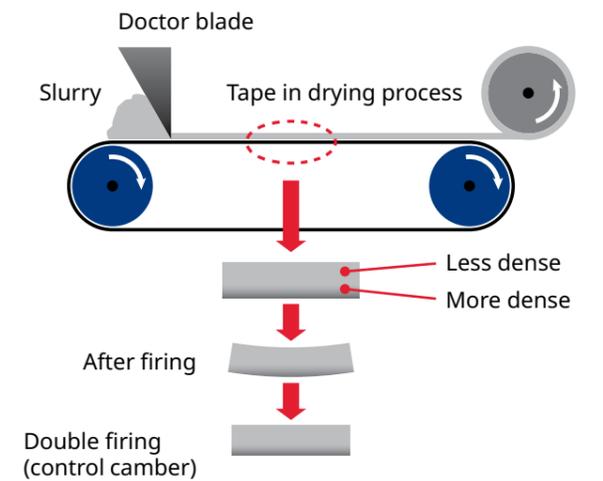

Classic method: Doctor blade method (DB)

## MATERIAL OVERVIEW

Properties		Unit	F99.7	FZM	DEGUSSIT FZY
Main component		-	$\alpha$ -Al <sub>2</sub> O <sub>3</sub>	ZrO <sub>2</sub> , MgO	ZrO <sub>2</sub> , Y <sub>2</sub> O <sub>3</sub> , Al <sub>2</sub> O <sub>3</sub>
Colour		-	ivory	yellow	white
Density		g/cm <sup>3</sup>	> 3.90	≥ 5.70	≥ 5.60
Open porosity		vol.-%	0	0	0
Average crystal size		µm	10	50	30
<b>Mechanical characteristics</b>					
Hardness		-	1,760 (HV1)	1,220 (HV1)	1,400 (HV1)
Compressive strength		MPa	2,500	2,000	2,000
Bending strength $\sigma_m$	DIN EN 843-1	MPa	350	500	400
Young's modulus	static	GPa	380	185	200
Poisson's ratio		-	0.24	0.3	-
Fracture toughness	SEVNB	MPa*m <sup>0.5</sup>	5	6.3	-
<b>Thermal characteristics</b>					
Max. operating temperature		°C	1,950	900	1,700
Thermal conductivity 20 °C		W/(m*K)	34.9	3	2.5 (100 °C)
Specific heat 20 °C		J/(g*K)	900	400	400
Thermal expansion coefficient 20-500 °C		10 <sup>-6</sup> /K	7.3	10.4	10.4
<b>Electrical characteristics</b>					
Dielectric strength 20 °C		kV/mm	> 30	-	-
Specific electrical resistance 20 °C		Ω•cm	10 <sup>15</sup>	10 <sup>10</sup>	10 <sup>10</sup>

F99.7 hf	A476	A493	A445F
$\alpha$ -Al <sub>2</sub> O <sub>3</sub>	Al <sub>2</sub> O <sub>3</sub>	Al <sub>2</sub> O <sub>3</sub>	Al <sub>2</sub> O <sub>3</sub>
ivory	white	white	dark brown
≥ 3.90	3.7	3.86	3.8
0	0	0	0
20	-	-	-
1,640 (HV1)	13.7 (HV9.807N)	16.0 (Vickers Hardness)	12.7 (Vickers Hardness)
2,500	-	-	-
350	350	550	390
380	320	390	320
0.22	0.23	-	-
3.5	-	-	-
1,950	-	-	-
34.9	24	26	12
900	0.78	-	-
7.3	7.2	7.2	7.2
> 30	15	15	15
10 <sup>14</sup>	>10 <sup>14</sup>	>10 <sup>14</sup>	10 <sup>12</sup>

This is only an excerpt of all available materials at Kyocera. The data indicated on this table (are in line with the introductory German Industrial Standard DIN 60672-2 and) relate to test specimens from which they were obtained. They are not unconditionally applicable to other forms of the same material. The data must be regarded as indicative only. All data refer to a temperature of 20 °C, unless otherwise specified.

## ABOUT KYOCERA



### THE GLOBAL KYOCERA GROUP – A STRONG PARTNER.

- ▶ **Headquarters:** Kyoto, Japan
- ▶ **Established:** 1959
- ▶ **Employees:** over 83,000 worldwide
- ▶ **Number of subsidiaries:** 299 (as of March 31, 2022)
- ▶ **European headquarters:** Esslingen, Germany
- ▶ **European production sites:** Mannheim, Germany  
Selb, Germany  
(more subsidiaries in Europe)

**KYOCERA = KYOTO CERAMICS**

### KYOCERA – it all started with ceramics

Headquartered in Kyoto, Japan, Kyocera is a world leader for manufacturing of fine ceramic components for the technology industry. Kyocera has been developing advanced materials, focusing on fine ceramics technology, for over 60 years.


Kyocera now provides over 200 kinds of ceramic materials including oxide, non-oxide and some special composites, with cutting edge technology and services designed to meet the individual needs. We possess internationally recognized know-how in the field of high-performance ceramics, especially for ceramic-to-metal assemblies.

Kyocera supplies the most diverse industries and customers throughout the world with high-performance ceramics, ranging from very precise components to complex shaped parts of various sizes and dimensions for challenging applications.

With our production and development location in Central Europe, Kyocera is able to respond quickly to the growing market demand for fine ceramic components in Europe even more. Kyocera companies benefit from the group's cross-departmental way of thinking and working that goes beyond different industries and countries – ensuring maximum reliability for our customers.

## HIGH-PERFORMANCE CERAMICS FROM KYOCERA

Our customers expect precise, repeatable measuring results for sensor and measurement applications. Components made of high-performance ceramics provide long-term protection for sensitive sensors, even under the most demanding conditions.

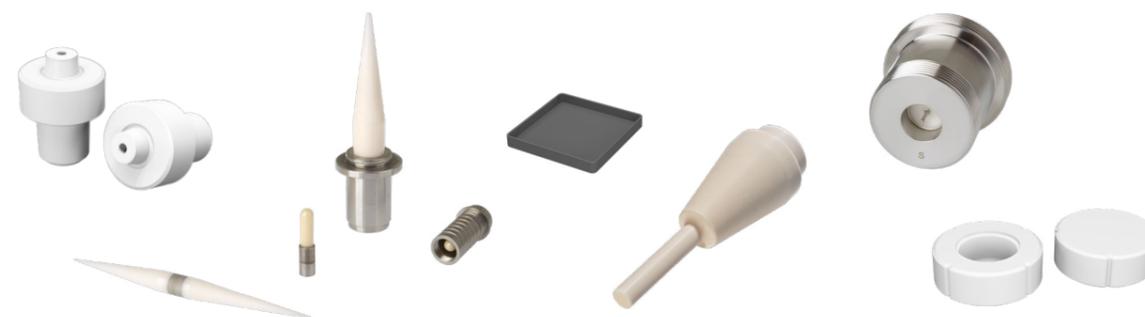

The application area for ceramics in sensor and measurement technology starts when other materials, such as plastic, metals or glass, have reached their limits. Components in advanced ceramics are extremely resistant to heat, corrosion, high voltage and chemical impacts. They are also extremely resistant to deformation and wear, and retain their functionality over a longer period of time.

The components in technical ceramics from Kyocera are characterised by the following properties:

- ▶ Electrically insulating
- ▶ Excellent microwave properties
- ▶ Oxygen conductivity at elevated temperatures
- ▶ Various metal coatings possible
- ▶ From small to big dimensions
- ▶ Low hysteresis of thin components
- ▶ Non-magnetic
- ▶ High dielectric strength



European headquarters:

**KYOCERA Europe GmbH**

Fritz-Müller-Strasse 27  
73730 Esslingen / Germany  
Tel: +49 711 93 93 4-0  
E-mail: [info.fc@kyocera.de](mailto:info.fc@kyocera.de)  
[www.kyocera-fineceramics.eu](http://www.kyocera-fineceramics.eu)

Sales office Neuss:

**KYOCERA Europe GmbH**

Hammfelddamm 6  
41460 Neuss / Germany  
Tel: +49 2131 16 37-0  
E-mail: [info.fc@kyocera.de](mailto:info.fc@kyocera.de)  
[www.kyocera-fineceramics.eu](http://www.kyocera-fineceramics.eu)

Plant Mannheim:

**KYOCERA Fineceramics Europe GmbH**

Steinzeugstrasse 92  
68229 Mannheim / Germany  
Tel: +49 621 40547-300  
E-mail: [info@kyocera-solutions.de](mailto:info@kyocera-solutions.de)  
[www.kyocera-solutions.de](http://www.kyocera-solutions.de)

Sales office Nordics:

**KYOCERA Fineceramics Nordics AB**

Jan Stenbecks Torg 17  
164 40 Kista / Sweden  
Tel: +46 8 44 66-910  
E-mail: [info@kyocera-solutions.se](mailto:info@kyocera-solutions.se)  
[www.kyocera-solutions.se](http://www.kyocera-solutions.se)